

HIGH FREQUENCY (26GHZ)

INTELLIGENT NONCONTACT RADAR LEVEL TRANSMITTER









86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



INDEX

1. Product description	2
2. Instrument introduction	3
3. Installation	15
4. Wiring	20
5. Calibration	23
6. Structure dimension	24
7. Technical data	26
8. Instrument linearity	28
9. Instrument model selection	32
10. Model selection data sheet	47

1



1. Product description

TLR90 series transmitters are 26GHz high-frequency radar level transmitters with analog signals 4-20mA, the Max. Measuring distance is up to 70m. The antenna has been further optimized, and the latest update microprocessor can make higher speed signals analysis, which enables the level transmitters can be used in very complicated measuring applications such as reaction kettles or solid bunkers.

2. Working principle


The radar level transmitter antenna emits narrower micro wave pulses which are transmitted via the antenna. The micro waves are reflected back after touching the surface of a medium, and then antenna system receives them and transmits them into the electrical circuit where they are automatically turned into the level signals.

- A. Setting measuring range
- B. Low level adjustment
- C. High level adjustment
- D. Dead zone



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



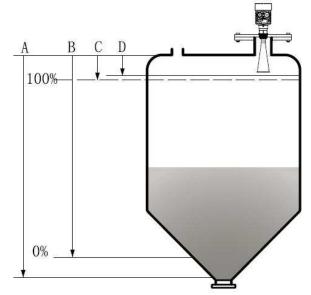

Measuring reference is the bottom surface of threads or the sealing surface of a flange. Note: when using the radar level transmitter, must keep the highest level of medium out of the dead zone (see area D shown in the drawing).

Features

The radar level transmitter adapts the emitting frequency of 26GHz, therefore it has the following features:

- > Noncontact measuring, no abrasion, no contamination
- > Easy installation due to small size of antenna
- > Shorter wave length, which can get better reflection for the inclined solid surface.
- Smaller measuring dead zone, which can get better measuring results for small tanks.
- Smaller beam angle, which makes the energy be more concentrated, enhancing the wave reflection ability which can keep signals more powerful to avoid obstacles.
- Almost unaffected by corrosion and foams.



email: sales@trumen.in,



Almost unaffected by changes of steam, changes of temperature and pressure in the air.

web: www.trumen.in

- Even in heavy dust environment, the transmitter can also receive the real level return wave.
- > High SNR, which can make the instrument get better performance.
- Frequency 26GHz is the best option for measuring solid and low dielectric constant medium.

3. Instrument introduction : TLR91

 Features: Corrosion resistant and wholly sealed radar antenna, short dead zone and easy installation. It's mainly used for measurement of strong corrosive liquids such as hydrochloric acid, nitric acid, sulfuric acid, alkali liquids, etc, in industries of chemical, metallurgy, refinery, food processing, etc.







86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




- Measuring range (maximum): 20m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Thread, flange
- Medium temperature: -60° C to $+120^{\circ}$ C
- Process pressure: -0.1 to +0.3MPa
- Accuracy: ±3mm
- Repeatability: ±1mm
- Frequency range: 26GHz
- Explosion proof: Ex ia IIC T6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire) , RS485/ Modbus
- Air purging and liquid rinsing: on request
- For those with communication of RS485/MODBUS, backlight is available on request

Dimensions of TLR 91

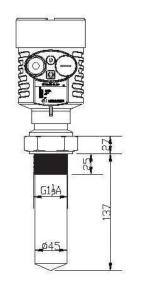

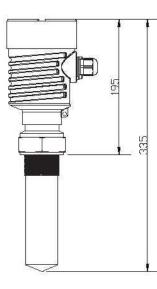






86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Installation of TLR 91

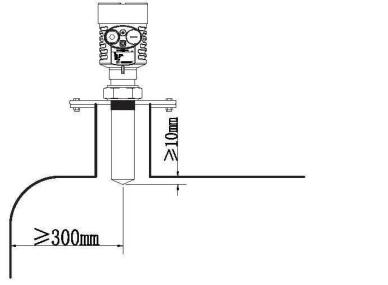

Installation with flange

Installation with thread

The minimum distance between the symmetrical central line of the transmitter and the inner tank wall should be at least 300mm

TLR 92

Features: Horn antenna, small beam angle, strong wave focusing, high accuracy. It's mainly used for measurement of light corrosive liquids with high temperature and pressure in industries of petroleum, chemical, metallurgy and water treatment, etc.






86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- Measuring range (maximum): 30m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Thread, flange
- Medium temperature: -60 ~ +250°C
- Process pressure: -0.1 ~ +4.0 MPa
- Accuracy: ±2mm
- Repeatability: ±1mm
- Frequency range: 26GHz
- Enclosure protection grade: IP67
- Explosion proof: Ex ia IIC T6 Ga
- Signal output: 4-20mA/ HART (2-wire/ 4-wire), RS485/Modbus
- For those with communication of RS485/MODBUS, backlight is available on request

Z04+H

Dimensions of TLR 92

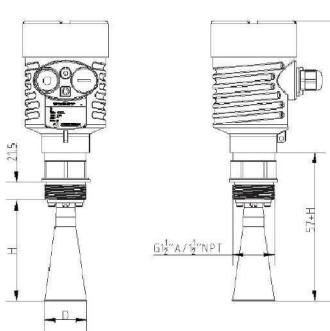

Horn model selection		
Horn diameter D	Horn height H (mm)	
Ø46	140	
Ø76	227	
Ø96	288	
Ø121	620	


4-1



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Installation of TLR92

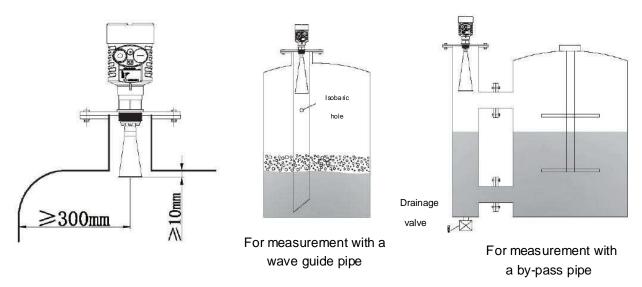

The minimum distance between the symmetrical central line of the transmitter and the inner tank wall should be at least 300mm

TLR 92H

• Features: High accuracy, strong strength of anti-interference, not affected by temperature, humidity, wind force and direction, easy installation and calibration, low power consumption.





86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- Application: Suitable for water level measurement and monitoring of lakes, reservoirs, rivers, open channels, and tidal level of oceans.
- Measuring range (maximum): 30m
- Process connection material: PP/ SS
- Medium temperature: -40°C~+100°C
- Process pressure: ATM
- Antenna material: SS
- Accuracy: ±3mm
- Frequency range: 26GHz
- Signal output: RS485/ Modbus
- Power supply: 6 to 24V DC
- Display: optional
- Backlight is available on request

TLR 93

• Application: Solid powder, particles, bulks, with heavy dust, easy crystallization and condensation, etc.






86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- Measuring range (maximum): 70m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Thread, flange or flange with universal joint, for antenna direction adjustment.
- Medium temperature: -60°C ~+250°C
- Process pressure: ATM, or, -0.1 +0.3 MPa
- Accuracy: ±15mm
- Repeatability:±2mm
- Frequency range: 26GHz
- Explosion proof: Ex ia IIC T6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire), RS485/Modbus
- With universal joint flange, the antenna can aim at the solid level surface exactly to get more accurate measured value.
- For those with communication of RS485/MODBUS, backlight is available on request

Dimensions of TLR93

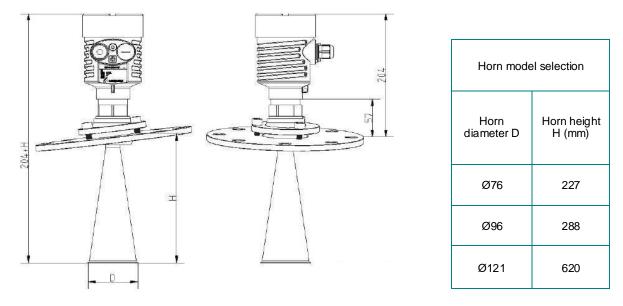




86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Installation of TLR 93

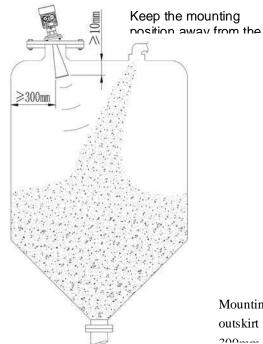

Mounting position: keep the outskirt of the antenna at least

TLR 93H

Features: High accuracy, strong strength of anti-interference, not affected by temperature, humidity and wind force and direction, easy installation and calibration, low power consumption.





86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- Application: Suitable for water level measurement and monitoring of rivers, reservoirs, lakes, open channels, and tidal level of oceans.
- Measuring range (maximum): 70m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection material: PP/ SS
- Medium temperature: -40°C~+100°C
- Process pressure: ATM
- Antenna material: SS
- Accuracy: ±10mm
- Frequency range: 26GHz
- Signal output: RS485/ Modbus
- Power supply: 6 to 24V DC
- Display: optional
- Backlight is available on request

TLR 94

• Application: Solid level for process tanks with heavy dust or ash, easy crystallization and condensation.etc.






86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- Measuring range (Maximum): 70m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Thread, flange
- Medium temperature: -60°C ~+250°C
- Process pressure: ATM, or -0.1 +0.3MPa
- Accuracy: ±15mm
- Repeatability: ±2mm
- Frequency range: 26GHz
- Explosion proof: Ex ia IIC T6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire), RS485/ Modbus
- With universal joint flange, the antenna can aim at the solid level surface exactly to get more accurate measured value
- For those with communication of RS485/MODBUS, backlight is available on request

Dimension of TLR94

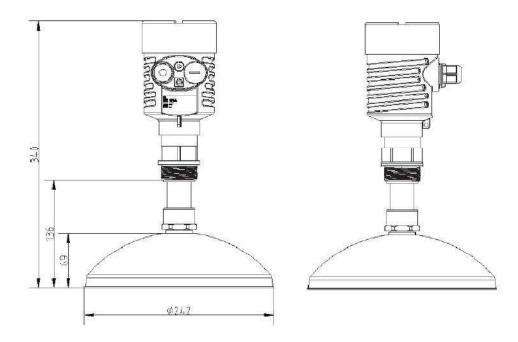




86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Installation of TLR 94

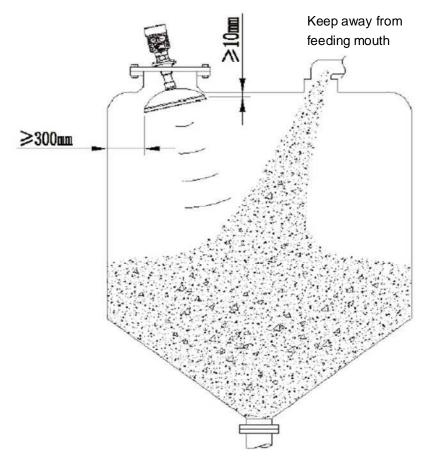

The minimum distance between the outskirt of the parabolic antenna and the inner tank wall should be at least 300mm



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR 95

• Application: liquid, solid particles and bulks




- Measuring range (Maximum): 35m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Thread, flange
- Medium temperature: -60°C ~ +250°C
- Process pressure: -0.1 +4.0 MPa, or ATM
- Accuracy: ±3mm (for liquids); +/-10mm for solids
- Repeatability: ±1mm
- Frequency range: 26GHz
- Explosion proof: Ex ia IIC T6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire), RS485/ Modbus
- For those with communication of RS485/MODBUS, backlight is available on request



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




Dimension of TLR95

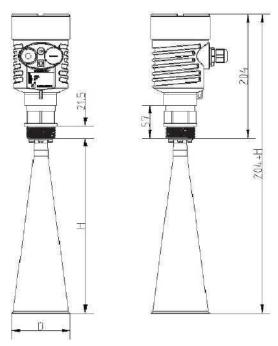

Horn model selection		
Hom diameter D	Horn height H (mm)	
Ø76	227	
Ø96	288	
Ø121	620	

Installation of TLR95

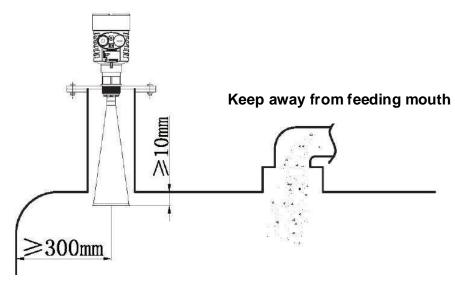

The minimum distance between the symmetrical central line of the transmitter and the inner tank wall should be at least 300mm



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR 95 (F)

- Feature: Sealed antenna with anti-corrosion cover
- Antenna size: 62mm, corresponding to flange sizes, DN80, DN100; 96mm, corresponding to flange sizes, DN150, DN200
- Application: be suitable for strong acids, alkalis, or other strongly corrosive liquids, or liquids with heavy steam, etc.
- Measuring range: 35m
- Process connection: Flange
- Working temperature range: -60 to +150°C
- Process pressure: -0.1 to 1.0MPa
- Accuracy: +/-3mm
- Working frequency: 26GHz
- Explosion proof: Ex ia IICT6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4 wire) or RS485/MODBUS
- For those with communication of RS485/MODBUS, backlight is available.

TLR 95 (FF)

- Feature: Whole sealed structure
- Antenna size: 62mm, corresponding to flange sizes, DN80, DN100; 96mm, corresponding to flange sizes, DN150, DN200
- Application: be suitable for strongly corrosive liquids tanks with corrosive environment
- Measuring range: 35m
- Process connection: Flange
- Working temperature range: -60 to +150°C
- Process pressure: -0.1 to 1.0MPa
- Accuracy: +/-3mm
- Working frequency: 26GHz
- Explosion proof: Ex ia IICT6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire) or RS485/MODBUS

http://www.trumen.in, Tel.: 0731-2435106, E-mail: sales@trumen.in





86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR 96

• Application: sanitary liquid storage containers, heavy corrosive container





- Measuring range (Maximum): 20m (depends on dielectric constant of different medium and the concrete working conditions)
- Process connection: Flange
- Medium temperature: -60 ~ +150°C
- Process pressure: -0.1 +0.3MPa, or, ATM
- Accuracy: ±2mm
- Repeatability: ±1mm
- Frequency range: 26GHz
- Explosion proof: Ex ia IIC T6 Ga
- Enclosure protection grade: IP67
- Signal output: 4-20mA/ HART (2-wire/ 4-wire), RS485/ Modbus
- Those with communication of RS485/MODBUS, backlight is available



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




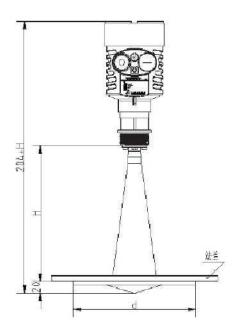

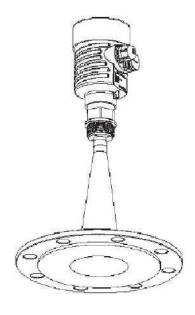

Horn model selection		
Horn diameter	Horn height	
D	H (mm)	
Ø76	227	Ø99
Ø96	288	Ø132
Ø121	620	Ø156

Installation of TLR96

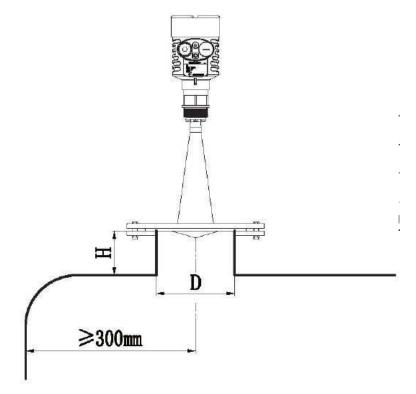

D	н
Ø50mm	100mm
Ø80mm	150mm
Ø100mm	200mm

The minimum distance between the symmetrical central line of the transmitter and the inner tank wall should be at least 300mm



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



4. Installation

Preparation before installation

Please note the below items to make sure the proper installation of the instrument:

Please leave enough space for the installation.

Please keep the installation position away from where

there is strong vibration.


In order to make the fast, easy and safe installation, please follow the installation instructions below!


Installation instruction (refer to the figure upper right): the instrument should be mounted at 1/6 of the tank diameter and the minimum distance between the symmetrical central line of the transmitter and the inner tank wall should be more than 300mm

Note: ①: Reference surface

2: Symmetrical central line of the tank

- Tapered tank: When the top surface of a tank is flat, the instrument can be mounted in the middle of the top, which can ensure the measurement to the bottom of the tank.
 1/6 o diame
- Tank with pile: the antenna should focus on the material surface vertically. When the solid level surface is not flat and horizontal, and repose angle is big, a flange with a universal joint must be used, with which the angle of the antenna can be adjusted and focus on the material surface as much as possible.

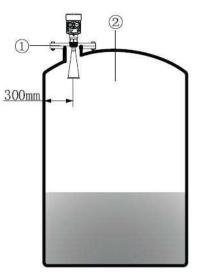


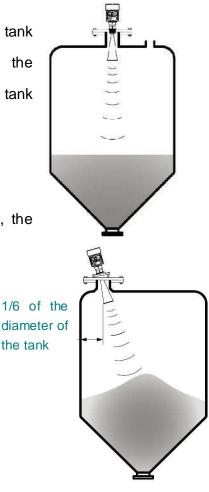




86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in

- Typical installation error
- Instrument cannot be mounted above feeding inlet. Keep the installation place away from sunshine or rain for the outdoor installation.
- □ : Correct
- □ : Wrong

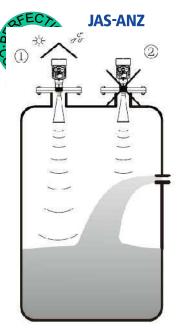

- The instrument cannot be mounted at the middle of a tank with arch top. If so, it will have indirect echoes and be affected by multiple echoes. Multiple echoes amplitudes might be stronger than those of the real return signals. The arch top can cause multiple echoes. Therefore, the instrument cannot be mounted at the center of the tank top.
- : Correct
- □ : Wrong

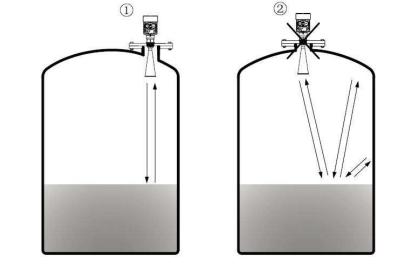


A reflector is needed when there is an obstacle which may interrupt the measurement in the tank.




86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




- □ : Correct
- □ : Wrong

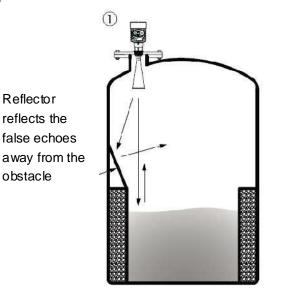

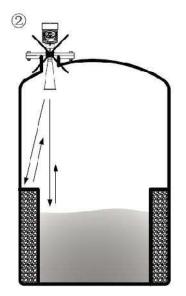

- Measurement with Wave guide pipe
 - \geq When there is an obstacle in the area of the signal beam, e.g. a ladder, a limit switch, a heating device, a rack or a blender, etc, it will interrupt the measurement and lead to wrong measuring result. In this case, a wave guide pipe is needed for the measurement.

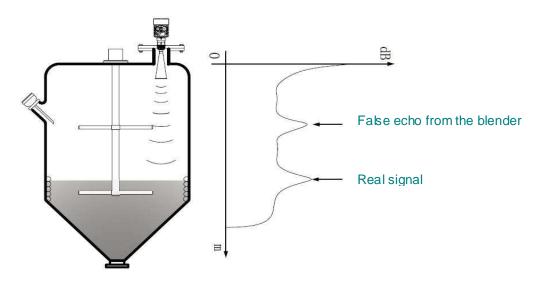




86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Installation by a wave guide pipe (a wave guide pipe or a bypass pipe) can avoid being affected by any obstacle, foams or liquid waves.

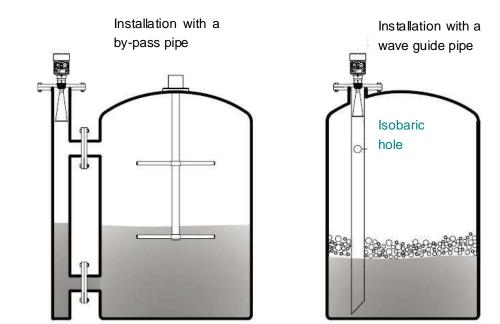


Note:

The isobaric hole diameter is (5~10) mm.

Min. diameter of a wave guide pipe is at least 50mm with smooth inner wall.

With a wave guide pipe, instruments can only measure a liquid with good liquidity. Measurement with a wave guide pipe is not suitable for viscous liquids.


Height of the extension pipe (or, mounting pipe, or nozzle): the antenna must be extended into the tank at least 10mm. (please refer to the pictures below)

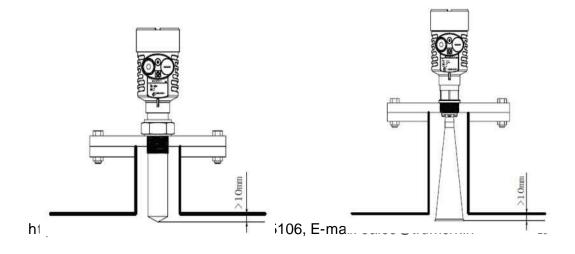



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



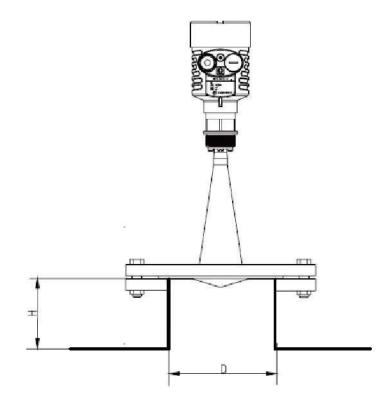

D	H max
50mm	100mm
80mm	150mm
100mm	200mm

5. Electric Connection

• Power supply (4~20) mA/ HART (2-wire)

Power supply shares one 2-wire cable with the output signal. Regarding to the actual power supply voltage, see the technical data. A safety barrier must be installed between the power supply and the transmitter for the intrinsically safe type.

(4~20) mA/ HART (4-wire)

Power supply and signal current are separate; each has one 2-wire cable. See the technical data for the actual power supply voltage.

RS485/Modbus

Power supply and the Modbus signal wire are separate; each has one 2-wire shielded cable. See the technical data for the actual power supply voltage.



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



• Cable

General introduction

Cable OD: 5 ~ 9mm (M20 x 1.5)

3.5mm ~ 8.7mm (1/2NPT)

2-wire or 4-wire cables are used for the electric connection. Due to the electromagnetic interference from the motor drive device, power supply wires or remission devices, the transmitter wires need to be the shielded cable.

(4~20) mA/ HART (2-wire)

Normal 2-wire cable can be used for the power supply.

(4~20) mA/ HART (4-wire)

Cables with ground wire for the power supply.

RS485/ Modbus


Power supply cables should be shielded cable. Shielded wire and ground wire of the cable Ideally the two ends of shielded wire should be connected the ground. But note that: there will be the grounding compensation current passing through the shielded wire. A grounding electric capacity (e.g. 1µF: 1500V) can be connected to one end (e.g. switch cabinet) when the both ends are connected to the ground. Try to use a resistance with much possible lower value to be connected to the ground. (Note: if the transmitter is used in the Explosion proof area, it is not allowed to connect the both ends to the ground due to the potential output.)



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




- Wiring
- ➢ 24V, 2-wire:

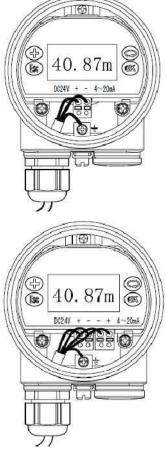

> 24V, 4-wire:

➢ 24V, RS485/ Modbus:





Trumen Technologies Pvt. Ltd. 86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106

email: sales@trumen.in,



Safety instruction

All the electric connection must be done under the situation of power being off. Please follow the instructions of the manual.

web: www.trumen.in

Please follow the requirements of the local regulation on electrical connection.

Please follow the local regulations on human health and safety. All the electrical operation must be done by the qualified professional technicians.

Please check the nameplate of a transmitter to ensure it can meet your technical requirements. Please make sure the power supply is in accordance with the value printed on the name plate.

• Enclosure protection grade

This instrument is in fully conformity with the requirements of the enclosure protection grade IP67. Please make sure the waterproof performance of the cable entry seal. See the picture on the right:

How to make sure the installation can meet the requirements of IP67:

Please make sure the cable entry seal is not damaged.

Please make sure the cable is not damaged.


Please make sure the cable meets the requirements of the

electrical connection regulations.

Bend the cable down before entering the electrical inlet, which will keep the water away from the housing, see mark ① at the above picture.

Please tighten the cable entry seal, see mark $\,\textcircled{2}\,$ at the above picture.

Please tighten the unused cable entry with a seal cap. See mark 3 at the above picture.

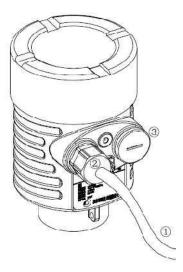



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



6. Transmitter calibration


• Methods of debugging

There are three debugging methods for TLR90:

- (1): With display/ buttons
- 2: With a PC with a software
- ③: With a HART hand-hold communicator
- **Display/ button**: Debugging can be done with the 4 buttons on the display screen. Menu language is optional. After debugging, the display keeps the normal working condition. The measured values can be clearly read through the glass screen.

Display/button


- $(\underline{1})$: LCD display
- ②:Buttons
- ③: Wiring terminal

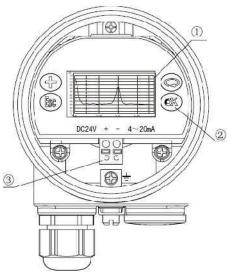

• Debugging with a PC with a software

Connect a PC with a HART modem

- $(\underline{1}): \mathsf{RS232}$ interface or USD interface
- 2 : TLR9X
- ③: HART adapter
- (4) : A resistance of 250Ω

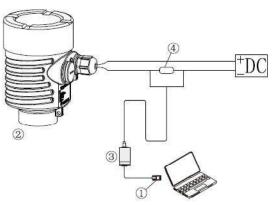

http://www.trumen.in, Tel.: 0731-2435106, E-mail: sales@trumen.in



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




· HART hand-hold communicator

TLR 9X Radars can be calibrated with a HART


hand-hold communicator.

- $(\underline{1}): A HART hand-hold communicator$
- 2 TLR9X
- 3 A resistance of 250 Ω

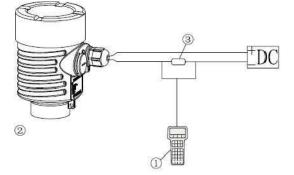

7. Structure dimensions (unit: mm)

Housing

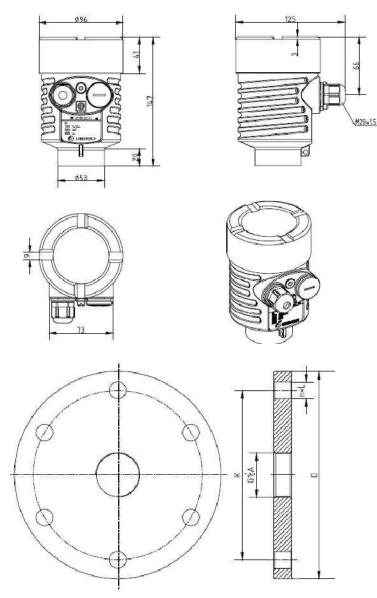



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Flange selection table

	Flange Model (GB/T9119-2000)				
No.	Size	OD	Hole Center Distance K	Holes Quantity N	Hole Diameter L
1	DN50	Ø165	Ø125	4	18
2	DN80	Ø200	Ø160	8	18
3	DN100	Ø220	Ø180	8	18
4	DN150	Ø285	Ø240	8	22
5	DN200	Ø340	Ø295	12	22
6	DN250	Ø405	Ø355	12	26



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



- 8. Technical data
 - General data

Model	TLR91	TLR92	TLR93	TLR94	TLR95	TLR96
	Thread	Thread	Thread	Thread	Thread	Thread
	G1½″ A	G1½″ A	G1½″ A	G1½″ A	G1½″ A	G1 ¹ /2″ A
Process Connection	Thread 1½″ NPT Flange	Thread 1½″ NPT Flange	Thread 1½″ NPT Flange	Thread 1 ¹ ⁄2″ NPT Flange	Thread 1 ¹ ⁄2″ NPT Flange	Thread 1½″ NPT Flange
Antenna	PVDF	Stainless/	Stainless/	Stainless/	Stainless/	Stainless/
Material		PVDF	PVDF	PVDF	PVDF	PVDF

Housing

Seal material between housing and cover: silicon rubber

Display window material: PC

Ground connection terminal material: Stainless steel

Weight:

- TLR 91 1kg (depends on the process connection)
- TLR 92 2kg (depends on the process connection)
- TLR 93 6kg (depends on the process connection)
- TLR 94 7kg (depends on the process connection)
- TLR 95 2kg (depends on the process connection)
- TLR 96 3kg (depends on the process connection)

Power supply:

2-wire Standard type: (16~26) V DC

Intrinsically safe: (21.6~26.4) V DC

Power consumption: max 22.5mA/ 1W

http://www.trumen.in, Tel.: 0731-2435106, E-mail: sales@trumen.in



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



32

Allowed ripple: <100Hz Uss<1V (100~100K)Hz Uss<10Mv

Cable parameter

Cable inlet/ plug: 1 M20x1.5 cable entry (cable diameter 5~9mm), one blindness block,

M20x1.5 Wiring terminal: cross section 2.5mm²

Output parameter

Output signal/ communication protocol: (4~20) mA/ HART, RS485/ Modbus

Resolution: 1.6µA Error signal: output current no change, 20.5mA, or 22mA, or 3.9mA

2-wire, load resistance, see the drawing below:

Integral time: (0~50) s, adjustable

Features:

Dead zone: the remote end of an antenna

Max. measuring range: TLR91	20m (liquids)
TLR92	30m (liquids)
TLR93	70m (solids)
TLR94	70m (solids)
TLR95	35m (liquids or solids)
TLR96	20m (liquids)

Note: the actual maximum measuring range finally depends on the dielectric constant and concrete working conditions. Micro-wave frequency: 26GHz

Communication connection: HART communication protocol/

Modbus communication protocol;

Measuring interval: approx. 1 second (depends on the parameter setting)

Adjustable time: approx. 1 second (depends on the parameter setting)

Display resolution: 1mm

Ambient temperature: (-40~+70)°C



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Process temperature (temperature of antenna):

TLR91	(-60°C ~+120°C)
TLR92	(-60℃~+250℃)
TLR93	(-60℃~+250℃)
TLR94	(-60°C ~+250°C)
TLR95	(-60° ℃~+250°℃)
TLR96	(-60°C ~+150°C)

Relative humidity: <95%


Pressure: Max. 4Mpa

Resistance to vibration: mechanic vibration 10m/s², (10-150) Hz

9. Transmitter linearity

TLR 91:

Beam angle 20°

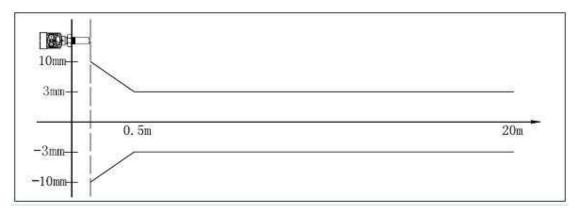



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in




TLR 92

Beam angle depends on the antenna dimension

Antenna Size (mm)	Beam angle
Φ46	18°
Φ76	12°
Φ96	8°
Ф121	6°

For the accuracy, please refer to the graph below:

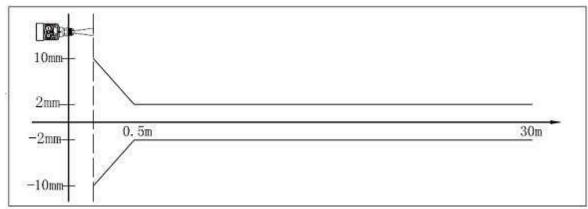

TLR93

Beam angle depends on size of antenna


Antenna Size (mm)	Beam angle
Φ46	18°
Φ 76	12°
Φ 96	8°
Ф 121	6°



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



For the accuracy, please refer to the graph below

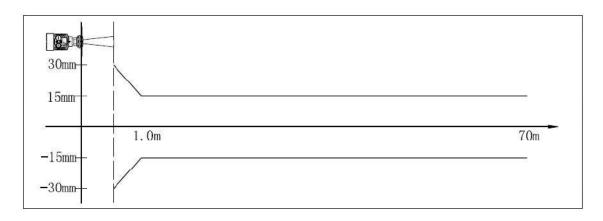


TLR 94

Beam angle depends on size of antenna

Antenna Size (mm)	Beam angle
Ф 196	5°
Φ242	4°

For the accuracy, please refer to the graph below:

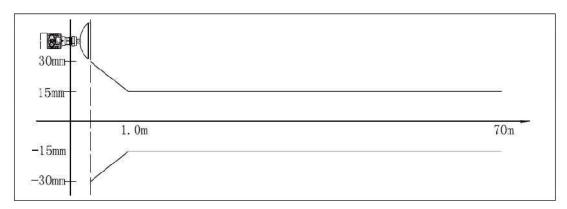

TLR95

Beam angle depends on size of antenna

Antenna Size (mm)	Beam angle
Φ76	12°
Ф 96	8°
Φ121	6°


http://www.trumen.in, Tel.: 0731-2435106, E-mail: sales@trumen.in



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



For accuracy, please refer to the graph below

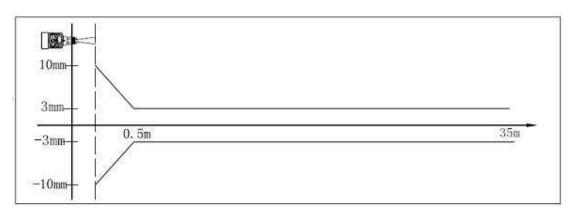


TLR96

Beam angle depends on size of antenna

Antenna Size (mm)	Beam angle
Φ46	18°
Φ76	12°
Φ96	8°

For the accuracy, please refer to the graph below

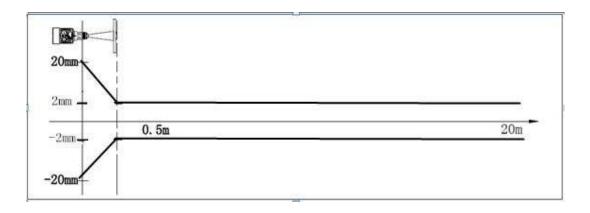



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Model selection

TLR91

Code	Approvals					
Р	Standard type (N	Standard type (Non-explosion)				
	Intrinsically safe	(Ex ia IIC T6 Ga)				
D	Intrinsically and	explosion proof type	e (Ex d IIC T6 Gb)		Termine Market Street	
Code	Antenna type	e/ Material/ Proc	ess temperatur	e		
F	PVDF/ (- 60 ~ +	120) ℃				
Code	Process con	nection/ Materia	al			
GP	Thread G1½″ A	/ PVDF				
Code	Flange matc	hing/ Material				
	Material	PP	PTFE	304 SS	316L SS	
Flange	size Code	(Face flange)	(Face flange)	(Face flan	ge) (Face flange)	
DN40	PN16 flange	AP	AF	AA	AB	
DN50	DN50 PN16 flange BP BF BA				BB	
DN65	PN16 flange	СР	CF	CA	СВ	
DN80	PN16 flange	DP	DF	DA	DB	
DN100) PN16 flange	EP	EF	EA	EB	
DN125	5 PN16 flange	FP	FF	FA	FB	
DN150) PN16 flange	GP	GF	GA	GB	
DN200 PN16 flange HP HF HA					HB	
DN250	DN250 PN16 flange JP JF JA					
ANSI 1.	ANSI 1.5" 150lb flange APM AFM AAM ABM					
ANSI 2"	150lb flange	BPM	BFM	BAM	BBM	
ANSI 2.	5" 150lb flange	СРМ	CFM	САМ	СВМ	

http://www.trumen.in, Tel.: 0731-2435106, E-mail: sales@trumen.in

37





sensing ma	atters					
ANSI 3"	150lb flange	DPM	DFM	DAM	DBM	
ANSI 4"	150lb flange EPM EFM EAM EBM					
ANSI 5"	150lb flange FPM FFM FAM FBM					
ANSI 6"	150lb flange	GPM	GFM	GAM	GBM	
ANSI 8"	150lb flange	HPM	HFM	HAM	HBM	
ANSI 10)" 150lb flange	JPM	JFM	JAM	JBM	
X No	one					
Y Spe	cial design					
Code	Antenna len	gth				
А	138mm					
Code	Electronic u	nit				
2	(4~20)mA/ 24V	DC 2-wire				
3	(4~20)mA/ 24V	DC 4-wire				
4	(4~20)mA/ 220\	/ AC 4-wire				
5	(4~20)mA/ 24V	DC/ HART, 2-wire				
6	(4~20)mA/ 24V	DC/ HART, 4-wire				
7	(4~20)mA/ 220\	/ AC/ HART, 4-wire				
8	RS485/ Modbus	;				
Y	Special design					
Code	Housing/ En	closure protecti	ion grade			
L	Aluminum/ IP67					
G	Stainless steel 304/IP67					
Code	Cable entry					
м	M20x1.5					
Ν	½″ NPT					
Code	Display/ Programmer					
v	With					
х	Without					



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



39

TLR 92

Code	Approvals	Approvals				
Р	Standard type (N	Standard type (Non-explosion)				
1	Intrinsically safe	(Ex ia IIC T6 Ga)			O	
D	Intrinsically and	explosion proof type	(Ex d IIC T6 Gb)		The second secon	
Е	Certificate for sh	ip building (CCS)			1	
Code	Process con	nection/ Materia	al			
GA	Thread G1½″ A	/ 304 stainless steel				
GB	Thread G1½″A	/ 316L stainless stee	el			
NA	NPT thread 11/2"	/ 304 stainless stee	el			
NB	NPT thread 11/2"	/ 316L stainless ste	el			
Code	Flange matc	hing/ Material				
\bigvee	Material	PP	PTFE	304 SS	S 316L SS	
Flange	size Code	(Face flange)	(Face flange)	(Face flan)
DN40 PN1	DN40 PN16 flange AP AF AA			AA	AB	
DN50 PN1	6 flange	BP	BF	BA	BB	
DN65 PN1	6 flange	СР	CF	CA	СВ	
DN80 PN1	6 flange	DP	DF	DA	DB	
DN100 PN	16 flange	EP	EF	EA	EB	
DN125 PN	16 flange	FP	FF	FA	FB	
DN150 PN	16 flange	GP	GF	GA	GB	
DN200 PN	16 flange	HP	HF	HA	HB	
DN250 PN	16 flange	JP	JF	JA	JB	
ANSI 1.	5" 150lb flange	APM	AFM	AAM	ABM	
ANSI 2"	' 150lb flange	BPM	BFM	BAM	BBM	
ANSI 2.	5" 150lb flange	СРМ	CFM	CAM	СВМ	





itters	20 - 00 ma			
150lb flange	DPM	DFM	DAM	DBM
150lb flange	EPM	EFM	EAM	EBM
150lb flange	FPM	FFM	FAM	FBM
150lb flange	GPM	GFM	GAM	GBM
150lb flange	HPM	HFM	HAM	НВМ
50lb flange	JPM	JFM	JAM	JBM
ne cial design				
Antenna typ	e/Material			
	Material	Stainles	e stool	Stainless steel
Code				316L
Flange size Horn antenna Φ36mm			٩	AB
Horn antenna	a Φ 46mm	B	۹.	BB
Horn antenna	a Φ 62mm	C	٩	СВ
Horn antenna	a Φ 76mm	D	٩	DB
Horn antenna	a Φ 96mm	E	٩	EB
Horn antenna	a Φ 121mm	F	4	FB
Special design				
Anticorrosiv	e function			
With				
Without				
High temperature adaptor/ Process temperature				
Without/ (-60~150)°C				
With/ (-60~250)°C				
Electronic unit				
	150lb flange 150lb flange 150lb flange 150lb flange 50lb flange e cial design Antenna type Code Size Horn antenna Horn antenna Horn antenna Special design Anticorrosiv With Without High temper Without/ (-60~15)	150lb flangeDPM150lb flangeEPM150lb flangeGPM150lb flangeJPM50lb flangeJPM50lb flangeJPM50lb flangeJPM50lb flangeJPM6MaterialCodeMaterialCodeMaterialCodeMaterialForn antennaΦ36mmHorn antennaΦ62mmHorn antennaΦ76mmHorn antennaΦ121mmSpecial designMaterialMithoutYithoutWithoutFunctionWithout/ (-60~150)°CWithout/ (-60~250)°C	150lb flange DPM DFM 150lb flange FPM FFM 150lb flange GPM GFM 150lb flange GPM JFM 150lb flange JPM JFM 50lb flange JPM JFM 50lb flange JPM JFM 50lb flange JPM JFM 6 JPM JFM 50lb flange JPM JFM 6 JPM JPM Horn antenna Φ26mm IPM Horn antenna Φ26mm IPM Special design IPM With IPM Without <t< td=""><td>150lb flange DPM DFM DFM 150lb flange EPM EFM EAM 150lb flange GPM GFM GAM 150lb flange GPM JFM HAM 150lb flange JPM JFM JAM 50lb flange JPM JFM JAM 50lb flange JPM JFM JAM 6 JPM JFM JAM 50lb flange JPM JFM JAM 6 JPM Material JAM Horn antenna Φ36mm A I I Horn antenna Φ121mm EA I I Special design I I I</td></t<>	150lb flange DPM DFM DFM 150lb flange EPM EFM EAM 150lb flange GPM GFM GAM 150lb flange GPM JFM HAM 150lb flange JPM JFM JAM 50lb flange JPM JFM JAM 50lb flange JPM JFM JAM 6 JPM JFM JAM 50lb flange JPM JFM JAM 6 JPM Material JAM Horn antenna Φ36mm A I I Horn antenna Φ121mm EA I I Special design I I I





sensing me	
2	(4~20)mA/ 24V DC 2-wire
3	(4~20)mA/ 24V DC 4-wire
4	(4~20)mA/ 220V AC 4-wire
5	(4~20)mA/ 24V DC/ HART, 2-wire
6	(4~20)mA/ 24V DC/ HART, 4-wire
7	(4~20)mA/ 220V AC/ HART, 4-wire
8	RS485/ Modbus
Y	Special design
Code	Housing/ Enclosure protection grade
L	Aluminum/ IP 67
G	Stainless steel 304/ IP 67
Code	Cable entry
м	M20x1.5
N	1/2″ NPT
Code	Programmer/ Display
v	With
x	Without
Code	For water level monitoring
н	Water in lake, river channel, reservoir, open channel, tidal level



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR93

Code	Approvals				
P		Standard type (Non-explosion)			
		(Ex ia IIC T6 Ga)			
D	-	explosion proof type (Ex d	IIC 16 Gb)	-	
Code	Process con	nection/ Material			
GA	Thread G1½″ A	/ 304 stainless steel			
GB	Thread G1½″ A	/ 316L stainless steel			
NA	NPT thread 11/2"	/ 304 stainless steel			
NB	NPT thread 11/2"	/ 316L stainless steel		L	
Code	Flange matc	hing/ Material			
	Material	304 SS	316L SS	304 SS	
Flange	size Code	(Face flange)	(Face flange)	(Universal flange)	
	PN16 flange	AA	AB	_	
DN50	PN16 flange	ВА	BB	_	
DN65	PN16 flange	CA	СВ	_	
DN80	PN16 flange	DA	DB	DW	
DN100) PN16 flange	EA	EB	EW	
DN125	5 PN16 flange	FA	FB	FW	
DN150) PN16 flange	GA	GB	GW	
DN200) PN16 flange	НА	HB	HW	
DN250 PN16 flange JA JB		JW			
ANSI 1.	ANSI 1.5" 150lb flange AAM ABM			_	
ANSI 2	" 150lb flange	BAM	BBM	_	
ANSI 2.	5" 150lb flange	CAM	CBM	_	
ANSI 3	" 150lb flange	DAM	DBM	DWM	





sensing ma	illers				
ANSI 4"	150lb flange	EAM	EBM	EWM	
ANSI 5"	150lb flange	FAM	FBM	FWM	
ANSI 6"	150lb flange	GAM	GBM	GWM	
ANSI 8"	150lb flange	HAM	НВМ	HWM	
ANSI 10)" 150lb flange	JAM	JBM	JWM	
X Nor	ie				
Y Spe	cial design				
Code	Air purging				
А	With				
В	Without				
Code	Antenna typ	e/ Material			
		Material	Stainless steel	Stainless steel	
Flange	Code		304	316L	
	Horn antenna	a Φ 36mm	AA	AB	
	Horn antenna	a Φ 46mm	ВА	BB	
	Horn antenna	a Φ 62mm	CA	СВ	
	Horn antenna	a Φ 76mm	DA	DB	
	Horn antenna	a Φ 96mm	EA	EB	
	Horn antenna	a Φ 121mm	FA	FB	
Y	Special design				
Code	Dust proof				
A	With				
В	Without				
Code	Radiation fin	s/ Process temperat	ure		
Р	Without/ (-60 ~ +150)°C				
G	With/ (-60 ~ +250)°C				





Code	Electronic unit
2	(4~20)mA/24V DC 2-wire
3	(4~20)mA/24V DC 4-wire
4	(4~20)mA/ 220V AC 4-wire
5	(4~20)mA/24V DC/ HART, 2-wire
6	(4~20)mA/24V DC/ HART, 4-wire
7	(4~20)mA/ 220V AC/ HART, 4-wire
8	RS485/ Modbus
Y	Special design
Code	Housing/ Enclosure protection grade
L	Aluminum/ IP 67
G	Stainless steel 304/ IP 67
Code	Cable entry
М	M20x1.5
Ν	½″ NPT
Code	Programmer/ Display
v	With
x	Without
Code	For water level monitoring
н	Water in lake, river channel, reservoir, open channel, tidal level



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR94

Code	Approvals	Approvals			
Р	Standard type (N	Standard type (Non-explosion)			
I	Intrinsically safe	(Ex ia IIC T6 Ga)		A CALL AND	
D	Intrinsically and	explosion proof type (Ex d	IIC T6 Gb)		
Code	Process con	nection/ Material			
GA	Thread G1½″ A	/ 304 SS		E.	
GB	Thread G1½″ A	/ 316L SS			
NA	NPT thread 11/2"	/ 304 SS			
NB	NPT thread 1½"	/ 316L SS			
Code	Flange matcl	hing/ Material			
	Material	304 SS	316L SS	304 SS	
Flange	size Code	(Face flange)	(Face flange)	(Universal flange)	
DN40	PN16 flange	AA	AB	_	
DN50	PN16 flange	BA	BB	_	
DN65	PN16 flange	CA	СВ	_	
DN80	PN16 flange	DA	DB	DW	
DN100) PN16 flange	EA	EB	EW	
DN125	5 PN16 flange	FA	FB	FW	
DN150) PN16 flange	GA	GB	GW	
DN200) PN16 flange	HA	HB	HW	
DN250) PN16 flange	JA	JB	JW	
ANSI 1.5" 150lb flange AAM		AAM	ABM	_	
ANSI 2" 150lb flange BAM BBM		BBM	_		
ANSI 2.	ANSI 2.5" 150lb flange CAM CBM				
ANSI 3"	ANSI 3" 150lb flange DAM DBM			DWM	
ANSI 4"	' 150lb flange	EAM	EBM	EWM	
ANSI 5"	' 150lb flange	FAM	FBM	FWM	





ensing mat	ters			1		
ANSI 6"						
ANSI 8"	NSI 8" 150lb flange HAM HBM HWM					
ANSI 10" 150lb flange JAM JBM JWM						
X None)					
Y Spec	ial design					
Code	Air Purging					
А	With					
В	Without					
Code	Antenna type	/ Material				
		$\Phi \Phi$ 196mm/ stainless stee Φ 242mm/ stainless stee				
Code	Radiation fins	/ Process temperatu	ıre			
Р	Without/ (-60 ~ +1	!50) ℃				
G	With/ (-60 ~ +250)°C				
Code	Electronic unit					
	(4~20)mA/ 24V D					
	(4~20)mA/24V D					
	(4~20)mA/ 220V /					
	(4~20)mA/ 24V D					
	(4~20)mA/ 24V D					
	(4~20)mA/220V	AC/ HART, 4-wire				
8	RS485/ Modbus					
\	Special design					
Y	Special design					
Y Code		losure protection gr	ade			
Code		losure protection gr	ade			
Code L	Housing/ Enc		ade			
Code L	Housing/ Enc		ade			
Code L G Code	Housing/ Enc Aluminum/ IP 67 Stainless steel 30 Cable entry		ade			
Code L G Code M	Housing/ Enc Aluminum/ IP 67 Stainless steel 30		ade			
Code L G Code M	Housing/ Enc Aluminum/ IP 67 Stainless steel 30 Cable entry M20x1.5	4/ IP 67	ade			
Code G Code M N Code	Housing/ Enc Aluminum/ IP 67 Stainless steel 30 Cable entry M20x1.5 ½″ NPT	4/ IP 67	ade			



Т

Trumen Technologies Pvt. Ltd.

86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR95

Г

Code	Approvals	Approvals			
Р	Standard type (N	Standard type (Non-explosion)			
I	Intrinsically safe	(Ex ia IIC T6 Ga)			
D	Intrinsically and	explosion proof type (Ex d	IIC T6 Gb)	÷	
E	Certificate for sh	ipbuilding (CCS)			
Code	Process con	nection/ Material			
GA	Thread G1½″ A	/ 304 stainless steel			
GB	Thread G1½″ A	/ 316L stainless steel			
NA	NPT thread 11/2"	/ 304 stainless steel		L	
NB	NPT thread 11/2"	/ 316L stainless steel			
Code		Flange m	atching/ Material		
	Material	304 SS	316L SS	316L SS	
Flange	size Code	(Face flange)	(Face flange)	(Universal flange)	
DN40	PN16 flange	AA	AB	_	
DN50	PN16 flange	BA	BB	_	
DN65	PN16 flange	CA	СВ		
DN80	PN16 flange	DA	DB	DW	
DN100) PN16 flange	EA	EB	EW	
DN125	5 PN16 flange	FA	FB	FW	
DN150) PN16 flange	GA	GB	GW	
DN200) PN16 flange	HA	НВ	HW	
DN250) PN16 flange	JA	JB	WL	
ANSI 1.	5" 150lb flange	AAM	ABM		
ANSI 2"	2" 150lb flange BAM BBM		_		
ANSI 2.	5" 150lb flange CAM CBM			_	
ANSI 3"	150lb flange	DAM	DBM	DWM	
ANSI 4"	150lb flange	EAM	EBM	EWM	





sensing ma	atters			•		
ANSI 5" 150lb flange FAM		FBM	FWM			
ANSI 6" 150lb flange GAM		GBM	GWM			
ANSI 8" 150lb flange		HAM	HBM	HWM		
ANSI 10" 150lb flange JAM		JBM	JWM			
X Nor	ne			<u>.</u>		
Y Spe	ecial design					
Code	Air purging					
А	With					
В	Without					
Code	Antenna type/ Material					
		Material	304 SS	316L SS		
Size Code			304 88	5102 55		
Horn antenna Ø36mm			AA	AB		
Horn anten na Φ 46mm			ВА	BB		
Horn anten na Φ 62mm Horn anten na Φ 76mm Horn anten na Φ 96mm			CA	СВ		
			DA	DB		
			EA	EB		
Horn antenna Φ 121mm			FA	FB		
Y	Special design					
Code	Anticorrosiv	e function				
А	With					
В	Without					
Code	Dustproof function					
А	With					
В	Without					
Code	High temperature adaptor/ Process temperature					



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



49

Р	Without/ (- 60 ~ +150)℃
G	With/ (- 60 ~ +250)°C
Code	Electronic unit
2	(4~20)mA/24V, DC, 2-wire
3	(4~20)mA/24V, DC, 4-wire
4	(4~20)mA/ 220V, AC, 4-wire
5	(4~20)mA/24V DC/ HART, 2-wire
6	(4~20)mA/24V DC/ HART, 4-wire
7	(4~20)mA/ 220V AC/ HART, 4-wire
8	RS485/ Modbus
Y	Special design
Code	Housing/ Enclosure protection grade
L	Aluminum/ IP 67
G	Stainless steel 304/ IP 67
Code	Cable entry
м	M20x1.5
N	½″ NPT
Code	Programmer/ Display
v	With
x	Without
Code	For Strongly Corrosive Liquids
F	Sealed antenna with anti-corrosion cover
FF	Whole sealed instrument
	Note: for antenna size of 96mm or 62mm (specially designed)



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



TLR96

Code	Approvals				
Р	Standard type (N		0,0		
I	Intrinsically safe		A Carter Street		
D	Intrinsically and				
Code	Flange matc				
	Material	304 SS	316L SS		
Flange	size Code	(Plane complex flange)	(Plane complex flange)		
DN50	PN16 flange	ВА	BB		
DN65	PN16 flange	СА	СВ		
DN80	PN16 flange	DA	DB		
DN100	PN16 flange	EA	EB		
DN125	5 PN16 flange	FA	FB		
DN150	PN16 flange	GA	GB		
DN200	PN16 flange	HA	НВ		
DN250	PN16 flange	JA	JB		
ANSI 2"	150lb flange	BAM	BBM		
ANSI 2.	5" 150lb flange	CAM	СВМ		
ANSI 3" 150lb flange		DAM	DBM		
ANSI 4" 150lb flange		EAM	EBM		
ANSI 5" 150lb flange		FAM	FBM		
ANSI 6" 150lb flange		GAM	GBM		
ANSI 8" 150lb flange		НАМ НВМ		1	





ANSI 10)" 150lb flange JAM JBM				
Y Special design					
Code	Radiation fins/ Process temperature				
Р	Without/ (- 60 ~	Without/ (- 60 ~ +150)°C			
Code	Electronic u	Electronic unit			
2	(4~20)mA/24V DC, 2-wire				
3	(4~20)mA/ 24V	(4~20)mA/ 24V DC , 4-wire			
4	(4~20)mA/ 220V AC , 4-wire				
5	(4~20)mA/ 24V DC/ HART, 2-wire				
6	(4~20)mA/ 24V DC/ HART, 4-wire				
7	(4~20)mA/ 220V AC/ HART, 4-wire				
8	RS485/ Modbus				
Y	Special design				
Code	Housing/ En	closure protection grade			
L	Aluminum/ IP 67				
G	Stainless steel 304/ IP 67				
Code	Cable entry				
м	M20x1.5				
N	½″ NPT				
Code	Programmer/ Display				
v	With				
x	Without				



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



m

10. Model selection data sheet

Company:		Con	Contact person:		
Address:		Post	Post code:		
Telephone:		Fax:	Fax:		
Mobile phone:		E-ma	E-mail:		
Date:					
Certificate					
□ Standard type (non-explosion proof) □ Intrinsically type (Ex ib IIB T5)					
□ Intrinsically typ	pe (Ex ib IIC T6 Gb)				
□ Intrinsically type +marine approval (Ex ib IIC T6 Gb)					
□ Intrinsically + explosion proof type (Ex d ib IIC T6 Gb)					
Tank/container information:					
Tank type:	□ Storage tank		□ Reaction tank		
	Separation tank		Marine tank		
Tank structure:					
	Tank material :		Tank pressure :		
Tank size:					
	Height of tank:	m	Diameter of tank:		

Top of a tank:

□ Arch □ Flat top □ Open □ Conic top



86, Tilak Path, Rambagh, Indore, MP, 452 007, India Phone: +91 (731) 656 2425, 243 5106 email: sales@trumen.in, web: www.trumen.in



Bottom of a tank:

□ Tapered	Flat			🗆 Ar	с
Installation positio	n:				
🗆 Тор 🗌	Side	🗆 Вура	ass pipe	🗆 Wave gu	iide pipe
Extension pipe (imp	ortant infor	mation):			
Extension pipe heig	ht (Length):	:	mm,		
Extension pipe diam	neter:		mm		
Measuring mediun	n:				
Medium name:		🗆 Liquid	Solid		b
Medium temperature: °C Dielectric constant:					
Adhesive: 🗆 Yes	s □	No	Stirring:	□ Yes	🗆 No
Process connectio	on:				
Thread: 🗆 G1½"	□ 1½″	NPT			
□ Flange (DN=)		Flange (ANSI=)	
Power supply:					
□ 24V DC 2-wire	□ 24V DC	C 4-wire	□ 220V AC	□ 6V DC	□12V DC
Output:					
□ 4-20mA		□ Hart		□RS48	5/Modbus
Display:					
□ With display and	l programm	er 🗆 W	ithout display	and program	mer